



Monitoring MySQL

MySQL PowerPack Beta version 100

Table of Contents

Introduction	3
What is MySQL?	3
What Does the MySQL PowerPack Monitor?	4
Installing the MySQL PowerPack	4
Configuration and Discovery	6
Prerequisites for Monitoring MySQL	6
Creating a SOAP/XML Credential for MySQL	7
Configuring the Credential to Read the MySQL Error Log	9
Discovering MySQL Servers	11
Verifying Discovery and Dynamic Application Alignment	13
Viewing MySQL Component Devices	16
MySQL Dashboards	18
Device Dashboards	18
MySQL: Instance	19

Chapter

1

Introduction

Overview

This manual describes how to monitor MySQL servers and instances in SL1 using the MySQL PowerPack.

The following sections provide an overview of MySQL and the MySQL PowerPack:

<i>What is MySQL?</i>	3
<i>What Does the MySQL PowerPack Monitor?</i>	4
<i>Installing the MySQL PowerPack</i>	4

NOTE: ScienceLogic provides this documentation for the convenience of ScienceLogic customers. Some of the configuration information contained herein pertains to third-party vendor software that is subject to change without notice to ScienceLogic. ScienceLogic makes every attempt to maintain accurate technical information and cannot be held responsible for defects or changes in third-party vendor software. There is no written or implied guarantee that information contained herein will work for all third-party variants. See the End User License Agreement (EULA) for more information.

What is MySQL?

MySQL is an open-source relational database management system delivering a Structured Query Language database server.

What Does the MySQL PowerPack Monitor?

To monitor MySQL servers using SL1, you must install the MySQL PowerPack. This PowerPack enables you to discover, model, and collect data about MySQL servers and instances.

The MySQL PowerPack includes:

- Dynamic Applications to discover, model, and monitor performance metrics and collect configuration data for MySQL servers and instances
- Device Classes for MySQL Servers and MySQL instances
- A sample credential for discovering MySQL servers
- Event Policies and corresponding alerts that are triggered when MySQL servers and instances meet certain status criteria
- A Device Dashboard for viewing data about MySQL servers and instances


Installing the MySQL PowerPack

Before completing the steps in this manual, you must import and install the latest version of the MySQL PowerPack.

TIP: By default, installing a new version of a PowerPack overwrites all content from a previous version of that PowerPack that has already been installed on the target system. You can use the **Enable Selective PowerPack Field Protection** setting in the **Behavior Settings** page (System > Settings > Behavior) to prevent new PowerPacks from overwriting local changes for some commonly customized fields. (For more information, see the **System Administration** manual.)

To download and install a PowerPack:

1. Download the PowerPack from the [ScienceLogic Customer Portal](#).
2. Go to the **PowerPack Manager** page (System > Manage > PowerPacks).
3. In the **PowerPack Manager** page, click the **[Actions]** button, then select *Import PowerPack*.
4. The **Import PowerPack** dialog box appears:

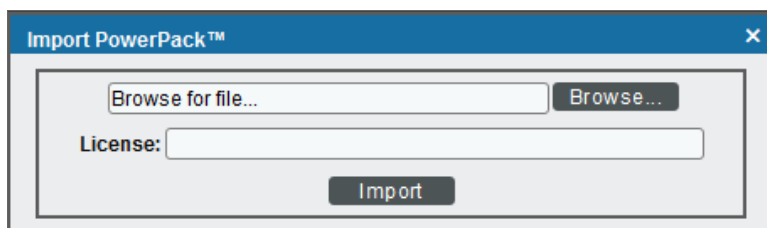

5. Click the **[Browse]** button and navigate to the PowerPack file.
6. When the **PowerPack Installer** modal page appears, click the **[Install]** button to install the PowerPack.

NOTE: If you exit the **PowerPack Installer** modal without installing the imported PowerPack, the imported PowerPack will not appear in the **PowerPack Manager** page. However, the imported PowerPack will appear in the **Imported PowerPacks** modal. This page appears when you click the **[Actions]** menu and select *Install PowerPack*.

Chapter

2

Configuration and Discovery

Overview

The following sections describe how to configure and discover MySQL for monitoring by SL1 using the MySQL PowerPack:

<i>Prerequisites for Monitoring MySQL</i>	6
<i>Creating a SOAP/XML Credential for MySQL</i>	7
<i>Configuring the Credential to Read the MySQL Error Log</i>	9
<i>Discovering MySQL Servers</i>	11
<i>Verifying Discovery and Dynamic Application Alignment</i>	13
<i>Viewing MySQL Component Devices</i>	16

Prerequisites for Monitoring MySQL

To configure the SL1 system to monitor MySQL servers and instances using the MySQL PowerPack, you must first create a read-only MySQL user for each instance to be monitored. For discovery of multiple instances on the same IP address, ScienceLogic recommends creating the same user and password on each instance. The user must have the minimum following privileges:

Privilege	Definition	Level(s)
SELECT	Enables the use of SELECT.	Global, database, table, column.


Privilege	Definition	Level(s)
EXECUTE	Enable the use of statements that execute stored routines (stored procedures and functions). This is necessary for queries on the system database.	

Creating a SOAP/XML Credential for MySQL

To configure SL1 to monitor MySQL, you must create a SOAP/XML credential. This credential allows the Dynamic Applications in the MySQL PowerPack to communicate with your MySQL server and instances.

The MySQLPowerPack includes an example SOAP/XML credential that you can use as a template for creating SOAP/XML credentials for MySQL.

To configure a SOAP/XML credential to access your MySQL server:

1. Go to the **Credential Management** page (System > Manage > Credentials).
2. Locate the **MySQL Example Credential** and click its wrench icon (). The **Edit SOAP/XML Credential** modal page appears.

3. Enter values in the following fields:

The screenshot shows the 'Credential Editor [97]' window. The title bar includes 'New' and 'Reset' buttons. The main area is divided into several sections: 'Basic Settings' (Profile Name, Content Encoding, Method, HTTP Version, URL, HTTP Auth User, HTTP Auth Password, Timeout), 'Proxy Settings' (Hostname/IP, Port, User), 'CURL Options' (a list of options with arrows), 'Soap Options' (Embedded Password [%P], Embed Value [%1] through [%4]), and 'HTTP Headers' (+ Add a header, Service:MySQL, Range:<port_begin>-<port_end>, Linux:<ssh_cred_id>). At the bottom are 'Save' and 'Save As' buttons.

Basic Settings

- **Profile Name.** Type a new name for the MySQL credential.
- **URL.** Type "%D".
- **HTTP Auth User.** Type the username for your MySQL server.
- **HTTP Auth Password.** Type the password for your MySQL server.

NOTE: To discover multiple MySQL instances on the same IP address, ScienceLogic recommends creating the same user and password on each instance, so the user will need to create only one credential.

HTTP Headers

- **HTTP Headers.** The following headers are in the example credential and are required:
 - Service:MySQL
 - Range:<port_begin>-<port_end>. Specify the range of ports on which your MySQL server is running. For example, "Range:3305-3310".
 - Linux:<ssh_cred_id>. If you have [configured credentials to read the error log](#), enter the credential ID for the SSH credential for a Linux server. For Windows servers, update the field to "Windows:<powershell_cred_id>".

4. For all other fields, use the default values.
5. Click the **[Save As]** button.


Configuring the Credential to Read the MySQL Error Log

In addition to the [SOAP/XML credential created to monitor MySQL](#), another credential must be created to read the MySQL Error Log. The credentials are configured differently for Linux and Windows servers.

For Linux servers, you must create an SSH/Key credential. To create the credential:

1. Go to the **Credential Management** page (System > Manage > Credentials).
2. Click the **[Action]**s button and select the option *Create SSH/Key Credential* for Linux servers or *Create PowerShell Credential* for Windows Servers.
3. Enter values in the following fields:

For Linux Servers:

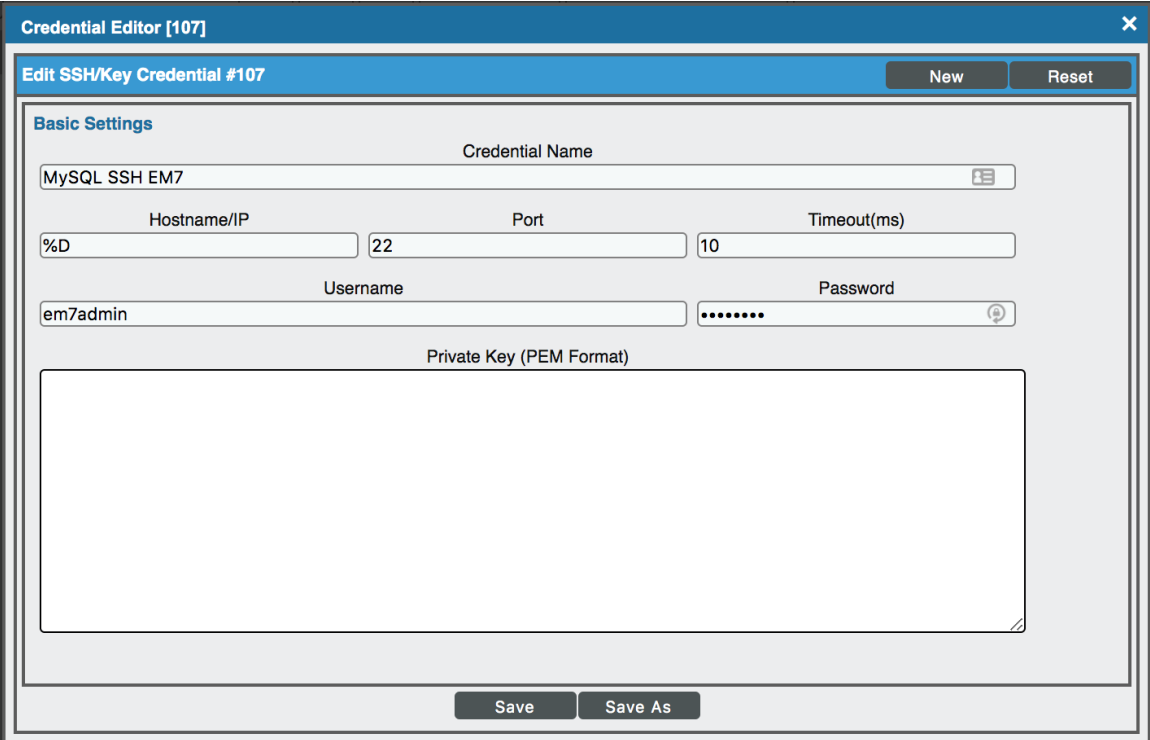

The screenshot shows the 'Credential Editor [107]' window. The title bar is blue with a close button. Below the title bar, the window is titled 'Edit SSH/Key Credential #107' and has 'New' and 'Reset' buttons. The main area is labeled 'Basic Settings' and contains the following fields:

- Credential Name:** A text box containing 'MySQL SSH EM7' with a dropdown arrow on the right.
- Hostname/IP:** A text box containing '%D'.
- Port:** A text box containing '22'.
- Timeout(ms):** A text box containing '10'.
- Username:** A text box containing 'em7admin'.
- Password:** A password field with masked characters and a show/hide icon.
- Private Key (PEM Format):** A large empty text area for pasting a private key.

At the bottom of the window, there are 'Save' and 'Save As' buttons.

- **Credential Name.** Type a new name for the credential.
- **Hostname/IP.** Type "%D".
- **Username.** Type the username for your Linux server.
- **Password.** Type the password for your Linux server.

4. For all other fields, use the default values.
5. Click the **[Save]** button.

For Windows servers, you must create a PowerShell credential. To create the credential:

1. Go to the **Credential Management** page (System > Manage > Credentials).
2. Click the **[Action]**s button and select *Create PowerShell Credential*.
3. Enter values in the following fields:


The screenshot shows the 'Credential Editor [100]' window with the title 'Edit PowerShell Credential #100'. It contains two main sections: 'Basic Settings' and 'Active Directory Settings'. In the 'Basic Settings' section, the 'Profile Name' is 'Windows-Powershell', 'Account Type' is '[Local]', 'Hostname/IP' is '%D', 'Timeout(ms)' is '180000', 'Username' is 'Administrator', and 'Password' is masked with dots. The 'Encrypted' dropdown is set to '[no]', 'Port' is '5985', and 'PowerShell Proxy Hostname/IP' is empty. The 'Active Directory Settings' section has empty fields for 'Active Directory Hostname/IP' and 'Domain'. At the bottom, there are 'Save' and 'Save As' buttons.

- **Profile Name**. Type a new name for the credential.
- **Hostname/IP**. Type "%D".
- **Username**. Type your username for the Windows server.
- **Password**. Type your password for the Windows server.

4. For all other fields, use the default values.
5. Click the **[Save]** button.

To configure the existing SOAP credential:

1. Go to the **Credential Management** page (System > Manage > Credentials).
2. Locate the *MySQL credential you created* and click its wrench icon (🔧). The **Edit SOAP/XML Credential** modal page appears.
3. In the **HTTP Headers** pane, enter the credential ID for the SSH credential for a Linux server. For Windows servers, update the field to "Windows:<powershell_cred_id>".

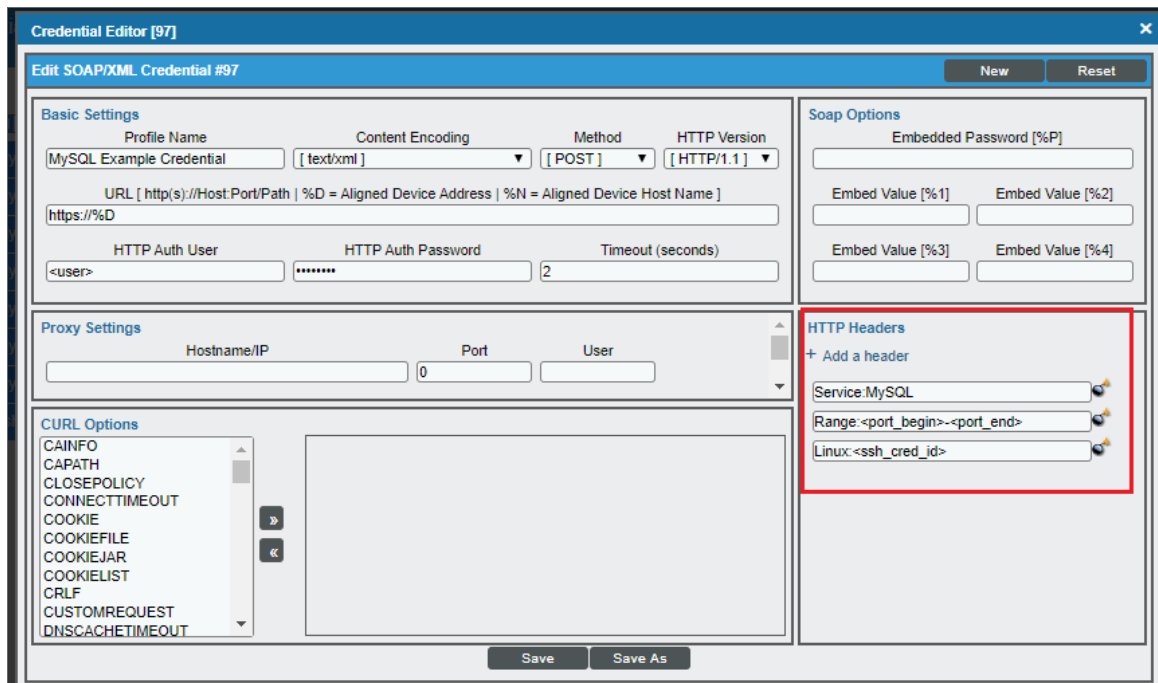

4. Click the **[Save]** button.

Discovering MySQL Servers

To model and monitor your MySQL servers and instances, you must run a discovery session to discover the MySQL server that SL1 will use as the root device for monitoring the MySQL instances.

Several minutes after the discovery session has completed, the "MySQL: Discovery" Dynamic Application in the MySQL PowerPack should automatically align to the MySQL server, creating the MySQL server container. The remaining Dynamic Applications in the PowerPack will then discover, model, and monitor the remaining MySQL instances.

To discover the MySQL server that you want to monitor, perform the following steps:



1. Go to the **Discovery Control Panel** page (System > Manage > Discovery).
2. In the **Discovery Control Panel**, click the **[Create]** button.

- The **Discovery Session Editor** page appears. In the **Discovery Session Editor** page, define values in the following fields:

The screenshot shows the 'Discovery Session Editor | Editing Session [1]' window. It is divided into several sections:


- Identification Information:** Fields for Name (SL1) and Description.
- IP and Credentials:**
 - IP Address/Hostname Discovery List:** A text field containing '10.2.21.17' and a 'Browse...' button.
 - SNMP Credentials:** A list of credentials including 'Cisco SNMPv2 - Example', 'Cisco SNMPv3 - Example', 'Cisco: CSP SNMP Port 161 Example', 'Cisco: CSP SNMP Port 1610 Examp', 'Dell EMC: Isilon SNMPv2 Example', 'EM7 Default V2', 'EM7 Default V3', and 'IPSLA Example'.
 - Other Credentials:** A list of credentials including 'Cisco CE Series status', 'Cisco VOS SOAP - Example', 'Cisco: Conductor Example (Discov', 'Cisco: Conductor Example (Virtua', 'Dell EMC XtremIO Example', 'Dell EMC: Isilon SOAP Example', 'Dynatrace Credential Example', 'MySQL Example Credential', and 'MySQL SL1'.
- Detection and Scanning:**
 - Initial Scan Level:** '[System Default (recommended)]'
 - Scan Throttle:** '[System Default (recommended)]'
 - Port Scan All IPs:** '[System Default (recommended)]'
 - Port Scan Timeout:** '[System Default (recommended)]'
 - Detection Method & Port:** A list of methods including 'UDP: 161 SNMP', 'TCP: 1 - tcpmux', 'TCP: 2 - compressnet', 'TCP: 3 - compressnet', 'TCP: 5 - rje', 'TCP: 7 - echo', 'TCP: 9 - discard', 'TCP: 11 - systat', 'TCP: 13 - daytime', and 'TCP: 15 - netstat'.
 - Interface Inventory Timeout (ms):** '600000'
 - Maximum Allowed Interfaces:** '10000'
 - Bypass Interface Inventory:** An unchecked checkbox.
- Basic Settings:**
 - Discover Non-SNMP:** Checked checkbox.
 - Model Devices:** Checked checkbox.
 - DHCP:** Unchecked checkbox.
 - Device Model Cache TTL (h):** '2'
 - Collection Server PID:** '2'
 - Organization:** '[System]'
 - Add Devices to Device Group(s):** A list containing 'None Servers'.
 - Apply Device Template:** '[Choose a Template]'

At the bottom, there are 'Save' and 'Save As' buttons, and a 'Log All' checkbox which is checked.


- **IP Address/Hostname Discovery List.** Type the IP address(es) of the MySQL server you want to discover.
 - **Other Credentials.** Select the SOAP/XML credential(s) you created for the MySQL server.
 - **Discover Non-SNMP.** Select this checkbox.
 - **Model Devices.** Select this checkbox.
- Optionally, you can enter values in the other fields on this page. For more information about the other fields on this page, see the **Discovery & Credentials** manual.
 - Click the **[Save]** button to save the discovery session and then close the **Discovery Session Editor** window.
 - The discovery session you created appears at the top of the **Discovery Control Panel** page. Click its lightning-bolt icon () to run the discovery session.
 - The **Discovery Session** window appears. When the cluster root device(s) are discovered, click the device icon () to view the **Device Properties** page for each device.

Verifying Discovery and Dynamic Application Alignment

To verify that SL1 has automatically aligned the correct Dynamic Applications during discovery, perform the following steps:

1. After discovery has completed, click the device icon for the MySQL server (.
2. From the **Device Properties** page for the MySQL server, click the **[Collections]** tab. The **Dynamic Application Collections** page appears.
3. The "MySQL: Discovery" Dynamic Application for the server is automatically aligned during discovery.

NOTE: It can take several minutes after the discovery session has completed for Dynamic Applications to appear in the **Dynamic Application Collections** page.

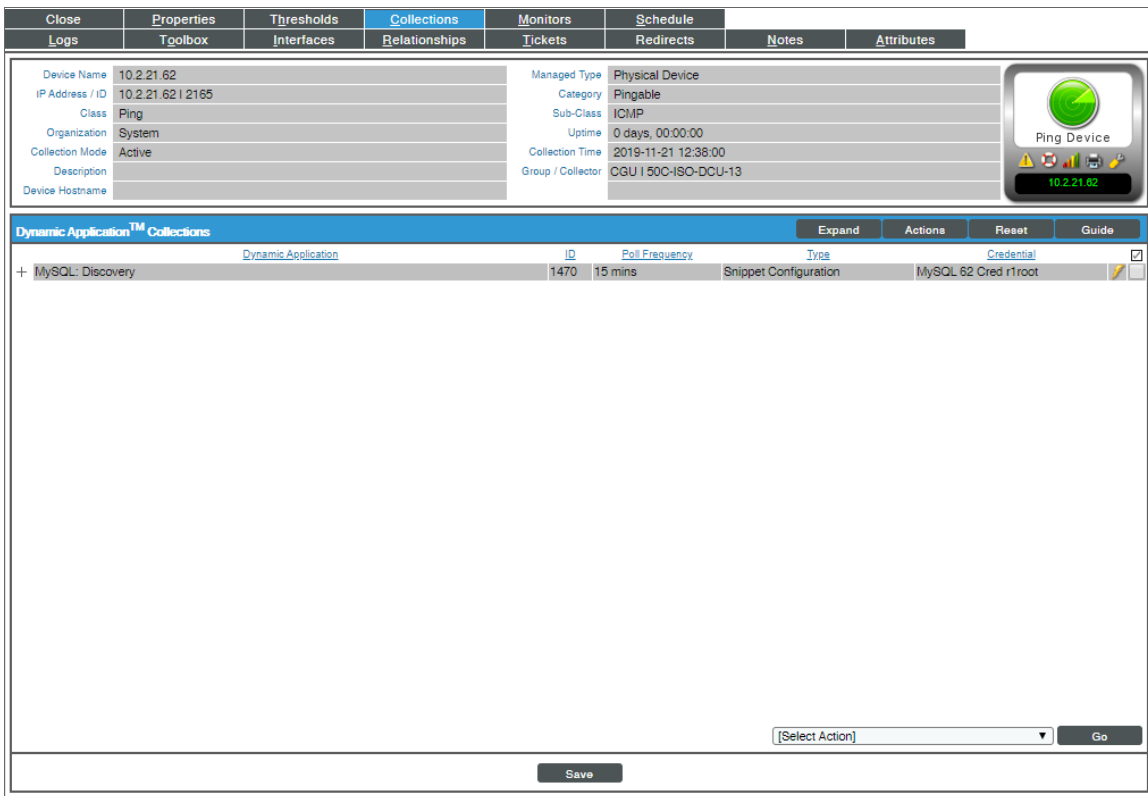

Close	Properties	Thresholds	Collections	Monitors	Schedule		
Logs	Toolbox	Interfaces	Relationships	Tickets	Redirects	Notes	Attributes
Device Name	10.2.21.62			Managed Type	Physical Device		
IP Address / ID	10.2.21.62 2165			Category	Pingable		
Class	Ping			Sub-Class	ICMP		
Organization	System			Uptime	0 days, 00:00:00		
Collection Mode	Active			Collection Time	2019-11-21 12:38:00		
Description				Group / Collector	CGU 50C-ISO-DCU-13		
Device Hostname							

Dynamic Application™ Collections						Expand	Actions	Reset	Guide
	Dynamic Application	ID	Poll Frequency	Type	Credential				
+ MySQL: Discovery		1470	15 mins	Snippet Configuration	MySQL 62 Cred r1root				

[Select Action] Go

Save

The MySQL server container will then be created and the "MySQL: Instance Discovery" Dynamic Application will auto-align to the server container. The MySQL server container will then discover, model, and monitor the remaining MySQL instances.

The following Dynamic Applications will auto-align to the MySQL instances:

- MySQL: Instance Commands Performance
- MySQL: Instance Handler Performance
- MySQL: Instance InnoDB Buffer Pool Performance
- MySQL: Instance InnoDB Data Performance
- MySQL: Instance InnoDB Row Performance
- MySQL: Instance Overall Performance
- MySQL: Instance Sort and Select Performance
- MySQL: Instance Table Locking Performance
- MySQL: Instance Threads and Connections Performance
- MySQL: Instance Configuration
- MySQL: Instance InnoDB Configuration


The following Dynamic Applications will not automatically align during discovery and will need to be manually aligned:

- MySQL: Events Errors Summary Configuration
- MySQL: Performance Schema Statements Configuration
- MySQL: Performance Schema Summary Statement Configuration
- MySQL: Process List Configuration
- MySQL: Statements With Error/Warning Configuration

NOTE: To collect data for the manually-aligned Dynamic Applications, you will need to enable the system database and performance_schema in the MySQL instance.

To manually align Dynamic Applications, perform the following steps:


1. Click the **[Action]** button and then select *Add Dynamic Application*. The **Dynamic Application Alignment** page appears:

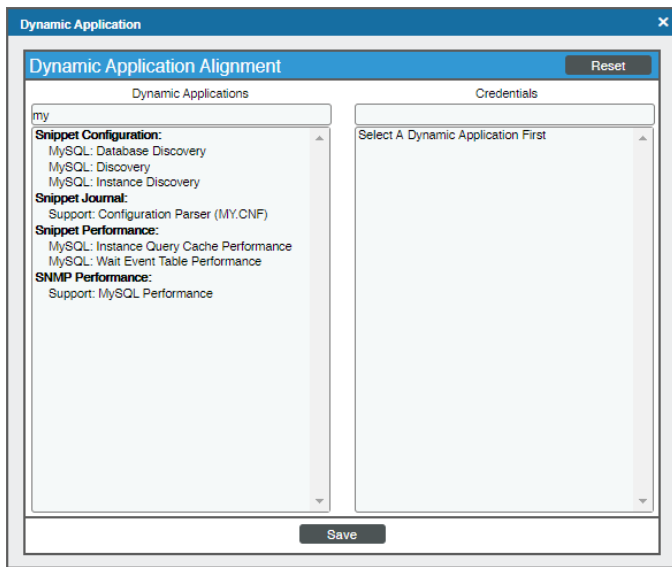

2. In the **Dynamic Applications** field, select the Dynamic Application you want to align.
3. In the **Credentials** field, select the credential specified in the table.
4. Click the **[Save]** button.
5. Repeat steps 1-4 for the other unaligned Dynamic Applications.

Viewing MySQL Component Devices

In addition to the **Device Manager** page (Registry > Devices > Device Manager), you can view the MySQL server and all associated component devices in the following places in the user interface:


- The **Device View** modal page (click the bar-graph icon  for a device, then click the **Topology** tab) displays a map of a particular device and all of the devices with which it has parent-child relationships. Double-clicking any of the devices listed reloads the page to make the selected device the primary device:



- The **Device Components** page (Registry > Devices > Device Components) displays a list of all root devices and component devices discovered by SL1 in an indented view, so you can easily view the hierarchy and relationships between child devices, parent devices, and root devices. To view the component devices associated with a MySQL server, find the MySQL server and click its plus icon (+):

Device Name	IP Address	Device Category	Device Class Sub-class	DD	Organization	Current State	Collection State	Collection State
10.2.21.20	10.2.21.20	Pingable	Ping ICMP	2145	System	Healthy	CGU	Active
MySQL Server	--	Software	Oracle MySQL Server	2149	System	Healthy	CGU	Active
1. MariaDB Server	10.1.35-MariaDB 7705	--	Software	Oracle MySQL Instance	2150	Major	CGU	Unavailable
2. MariaDB Server	10.1.35-MariaDB 7706	--	Software	Oracle MySQL Instance	2163	Healthy	CGU	Active
3. MariaDB Server	10.1.41-MariaDB 7706	--	Software	Oracle MySQL Instance	2162	Major	CGU	Unavailable
10.2.21.47	10.2.21.47	Pingable	Ping ICMP	2145	MySQL Org	Healthy	CGU	Active
10.2.21.62	10.2.21.62	Pingable	Ping ICMP	2156	System	Healthy	CGU	Active

- The **Component Map** page (Views > Device Maps > Components) allows you to view devices by root node and view the relationships between root nodes, parent components, and child components in a map. This makes it easy to visualize and manage root nodes and their components. SL1 automatically updates the **Component Map** as new component devices are discovered. The platform also updates each map with the latest status and event information. To view the map for a MySQL server, go to the **Component Map** page and select the map from the list in the left NavBar. To learn more about the **Component Map** page, see the **Views** manual.

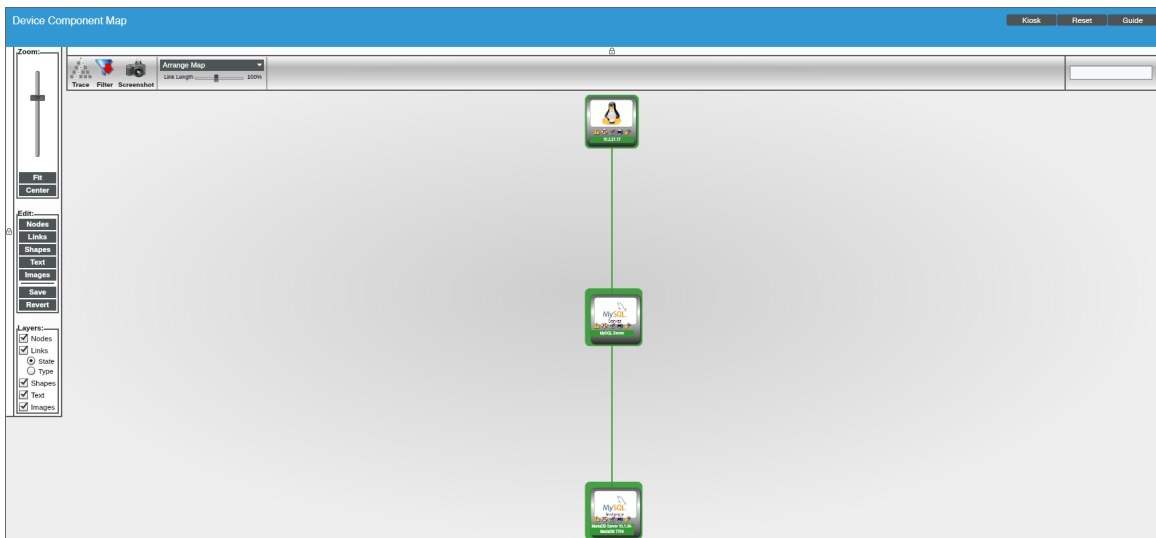

Chapter

3

MySQL Dashboards

Overview


The following sections describe the device dashboards that are included in the *MySQLPowerPack*:

<i>Device Dashboards</i>	18
<i>MySQL: Instance</i>	19

Device Dashboards

The *MySQL PowerPack* includes a device dashboard that provides summary information for MySQL instances.

MySQL: Instance

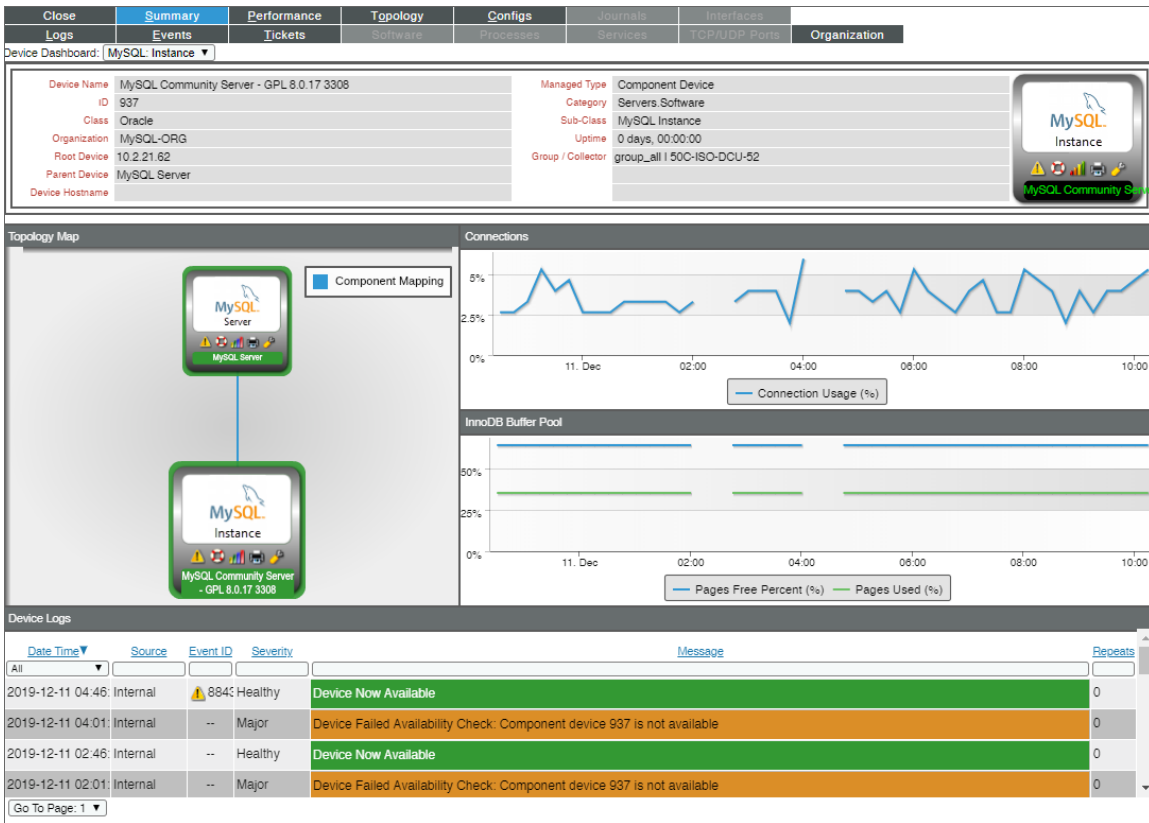

The MySQL: Instance device dashboard displays the following information:

- A topology map
- A Connections line chart that displays connection usage over a specified period of time
- An InnoDB Buffer Pool line chart that displays Pages Free Percent and Pages Used over a specified period of time
- Device logs

© 2003 - 2020, ScienceLogic, Inc.

All rights reserved.

LIMITATION OF LIABILITY AND GENERAL DISCLAIMER

ALL INFORMATION AVAILABLE IN THIS GUIDE IS PROVIDED "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED. SCIENCELOGIC™ AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT.

Although ScienceLogic™ has attempted to provide accurate information on this Site, information on this Site may contain inadvertent technical inaccuracies or typographical errors, and ScienceLogic™ assumes no responsibility for the accuracy of the information. Information may be changed or updated without notice. ScienceLogic™ may also make improvements and / or changes in the products or services described in this Site at any time without notice.

Copyrights and Trademarks

ScienceLogic, the ScienceLogic logo, and EM7 are trademarks of ScienceLogic, Inc. in the United States, other countries, or both.

Below is a list of trademarks and service marks that should be credited to ScienceLogic, Inc. The ® and ™ symbols reflect the trademark registration status in the U.S. Patent and Trademark Office and may not be appropriate for materials to be distributed outside the United States.

- ScienceLogic™
- EM7™ and em7™
- Simplify IT™
- Dynamic Application™
- Relational Infrastructure Management™

The absence of a product or service name, slogan or logo from this list does not constitute a waiver of ScienceLogic's trademark or other intellectual property rights concerning that name, slogan, or logo.

Please note that laws concerning use of trademarks or product names vary by country. Always consult a local attorney for additional guidance.

Other

If any provision of this agreement shall be unlawful, void, or for any reason unenforceable, then that provision shall be deemed severable from this agreement and shall not affect the validity and enforceability of any remaining provisions. This is the entire agreement between the parties relating to the matters contained herein.

In the U.S. and other jurisdictions, trademark owners have a duty to police the use of their marks. Therefore, if you become aware of any improper use of ScienceLogic Trademarks, including infringement or counterfeiting by third parties, report them to Science Logic's legal department immediately. Report as much detail as possible about the misuse, including the name of the party, contact information, and copies or photographs of the potential misuse to: legal@sciencelogic.com



800-SCI-LOGIC (1-800-724-5644)

International: +1-703-354-1010